

CMA-180T

High Temperature
Pot & Pan Single Rack
Dishwasher

FEATURES:

- **■** Energy Star approved.
- 60 racks / 240 covers per hour.
- Economical to operate. Uses only 1.24 gallons of water per cycle.
- Automatic soil purging system filters wash water and traps plate debris into an external tray. Tray can be easily removed for dumping contents.
- All stainless steel construction offers durable performance and years of trouble free operation.
- Built-in chemical resistant industrial 5kW heater and optional 12kW booster heater are proven to be more durable than commercial style heaters.
- Unique spray arm system features upper and lower stainless steel wash arms with reinforced end caps. Specially designed pull-pins allow wash arms to be easily removed for cleaning.
- Large 27" door opening accommodates larger items.
- Top mounted control box is water tight and includes a rack counter, extended wash/delimer switch and easy to read temperature gauges.
- Auto start/stop makes operation safe and easy.
- Field convertible for a wide range of applications.
- Auto Fill.
- Safety Temp feature assures 180°F sanitizing rinse every cycle.











Corner Model

Industrial wash tank and optional booster heaters are designed for years of trouble free service.



External scrap tray maintains clean wash water and prevents debris from clogging the drain.



Large 27" door opening accommodates larger items.




Top mounted control box is water tight and includes a rack counter, extended wash/delimer switch and easy to read temperature gauges.












CMA-180T

High Temperature
Pot & Pan Single Rack
Dishwasher

WARNING: Plumbing connections must be made by a qualified service company who will comply with all available Federal, State, and Local Health, Plumbing and Safety codes.

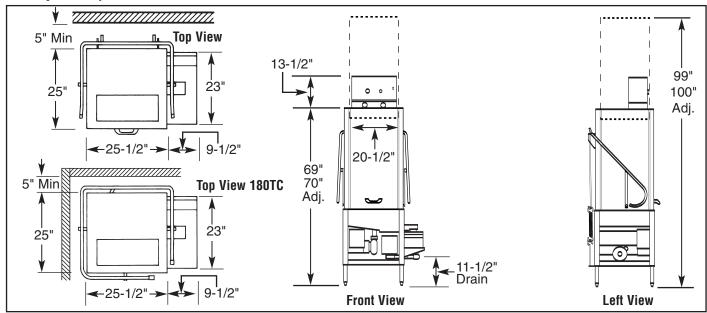

Specifications:

MODEL CMA-180T	USA	METRIC		USA	METRIC
WATER CONSUMPTION			WASH PUMP MOTOR HP	1	1
PER RACK	1.24 GAL.	(4.65 L)	FRAME DIMENSIONS		
PER HOUR	74.4 GPH	(281.2 L)	DEPTH	25"	(63.5cm)
OPERATING CYCLE			WIDTH	25-1/2"	(65cm)
WASH TIME - SEC.	44	44	HEIGHT	69"-70"	(175-178cm)
RINSE TIME - SEC.	11	11	STANDARD TABLE HEIGHT MAX CLEARANCE FOR DISHES	34" 27"	(86.3cm) (68.6cm)
TOTAL CYCLE	55	55	DRAIN CONNECTION (OFF FLOOR)	11-1/2"-12-1/2"	(29-32cm)
OPERATING CAPACITY			STANDARD DISHRACK	1	1
RACKS PER HOUR	60	60	DIMENSIONS	19-3/4" X 19-3/4"	(50X50cm)
WASH TANK CAPACITY	8 GAL.	(30.3 L)	ELECTRICAL RATING VOLTS	PHASE	AMPS
PUMP CAPACITY	68 GPM	(257 LPM)	WITHOUT BOOSTER 208	1	36
WATER REQUIREMENTS				l 2	38 24
WITHOUT BOOSTER HEATER	180°F	(82°C)	240	3	26
WITH BOOSTER HEATER	140°F	(60°C)	1	· ·	20
WATER INLET	3/4"	(1.9 cm)	WITH BOOSTER 208	1	78
DRAIN CONNECTION	2"	(5.1cm)	240	1	88
RINSE PRESSURE SET	20 ± 5psi	(1.41 kg/cm²)	208	3	49
	20 <u>-</u> Jpsi	(1.41 kg/ciii)		3	55
OPERATING TEMPERATURE	155°F-160°F	(68°C-71°C)			
WASH-°F (MIN)	180°F-195°F	,	SHIPPING WEIGHT		
RINSE-°F (MIN)	100 F-195°F	(82°C-90°C)	WITHOUT BOOSTER	353#	(160kg)
			WITH BOOSTER	396#	(180kg)

Summary Specifications: Model CMA-180T

The model CMA-180T single tank, high temperature dishwasher is designed for years of trouble free service, producing sparkling results while conserving energy, water and chemicals. This machine is available with an optional "built in" booster heater, assuring a continuous supply of 180°F hot water, and can accommodate dishes and utensils up to 27" high. Constructed entirely of stainless steel. Unique soil purging system filters wash water and plate debris into an external tray. The CMA-180T meets NSF, UL, CUL and CE standards.

Available Models

- CMA-180TS Tall Straight
- CMA-180TSB Tall Straight with booster
- CMA-180TC Tall Corner
- CMA-180TCB Tall Corner with booster

Available Options:

- Exhaust Fan Time Control
- Built-in 12kW booster heater
- CMA-180 Conversion Kit Corner to Straight
- CMA-180 Conversion Kit Straight to Corner
- Alternative electrical available for export
- Dual power supply connections

Stainless steel dishtables

2 minute cycle







CMA Dishmachines 12700 Knott Street Garden Grove, CA 92841 • 800-854-6417 • 714-898-8781 • Fax: 714-895-2141 • www.cmadishmachines.com